





- Available in zinc plated steel and stainless steel
- Ten Head style
- Many stud lengths available to meet your application requirement
- Refer ordering chart for finish type

► To purchase stainless steel studs change the last two digits of the part number from -16 to -20. Ex: 85-11-100-16 become 85-11-100-20


### Oval Slotted

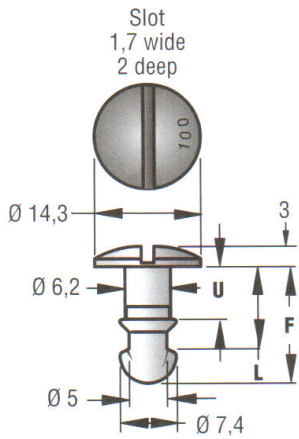


### Wing Head




### Hex Socket



### Bail Style RB



### Bail Style RA

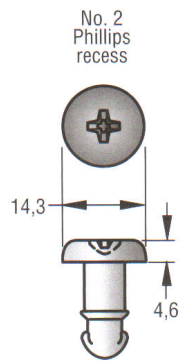

P/No:85-35-308-55  
P/No:85-35-313-55

P/No:85-35-311-55

Outer Panel Thk.		Outer Panel Thk.		Outer Panel Thk.		Stud Part Number				
Min	Max	Min	Max	Min	Max	Oval Slotted	Wing Head	Bail Style RB	Bail Style RA	Phillips recess
----	----	----	----	2.3	2.8	85-11-100-16	85-12-100-16	85-16-100-16	85-15-100-16	85-P-100
----	----	----	----	2.8	3.3	85-11-120-16	85-12-120-16	85-16-120-16	85-15-120-16	85-P-120
----	----	----	----	3.3	3.8	85-11-140-16	85-12-140-16	85-16-140-16	85-15-140-16	85-P-140
----	----	----	----	3.8	4.3	85-11-160-16	85-12-160-16	85-16-160-16	85-15-160-16	85-P-160
----	----	----	----	4.3	4.8	85-11-180-16	85-12-180-16	85-16-180-16	85-15-180-16	85-P-180
----	----	----	----	4.8	5.3	85-11-200-16	85-12-200-16	85-16-200-16	85-15-200-16	85-P-200
----	----	----	----	5.3	5.8	85-11-220-16	85-12-220-16	85-16-220-16	85-15-220-16	85-P-220
----	----	1.3	1.8	5.8	6.3	85-11-240-16	85-12-240-16	85-16-240-16	85-15-240-16	85-P-240
0.4	0.9	1.8	2.3	6.4	6.9	85-11-260-16	85-12-260-16	85-16-260-16	85-15-260-16	85-P-260
0.9	1.4	2.3	2.8	6.9	7.4	85-11-280-16	85-12-280-16	85-16-280-16	85-15-280-16	85-P-280
1.4	1.9	2.8	3.3	7.4	7.9	85-11-300-16	85-12-300-16	85-16-300-16	85-15-300-16	85-P-300
1.9	2.4	3.3	3.8	7.9	8.4	85-11-320-16	85-12-320-16	85-16-320-16	85-15-320-16	85-P-320
2.4	2.9	3.8	4.3	8.4	8.9	85-11-340-16	85-12-340-16	85-16-340-16	85-15-340-16	85-P-340
2.9	3.4	4.3	4.8	8.9	9.4	85-11-360-16	85-12-360-16	85-16-360-16	85-15-360-16	85-P-360
3.4	3.9	4.8	5.3	9.4	9.9	85-11-380-16	85-12-380-16	85-16-380-16	85-15-380-16	85-P-380
3.9	4.4	5.3	5.8	9.9	10.4	85-11-400-16	85-12-400-16	85-16-400-16	85-15-400-16	85-P-400
4.4	4.9	5.8	6.3	10.4	10.9	85-11-420-16	85-12-420-16	85-16-420-16	85-15-420-16	85-P-420
5	5.5	6.4	6.9	10.9	11.4	85-11-440-16	85-12-440-16	85-16-440-16	85-15-440-16	85-P-440
5.5	6	6.9	7.4	11.4	11.9	85-11-460-16	85-12-460-16	85-16-460-16	85-15-460-16	85-P-460
6	6.5	7.4	7.9	11.9	12.4	85-11-480-16	85-12-480-16	85-16-480-16	85-15-480-16	85-P-480
6.5	7	7.9	8.4	12.5	13.0	85-11-500-16	85-12-500-16	85-16-500-16	85-15-500-16	85-P-500
7	7.5	8.4	8.9	13	13.5	85-11-520-16	85-12-520-16	85-16-520-16	85-15-520-16	85-P-520
7.5	8	8.9	9.4	13.5	14.0	85-11-540-16	85-12-540-16	85-16-540-16	85-15-540-16	85-P-540
8	8.5	9.4	9.9	14	14.5	85-11-560-16	85-12-560-16	85-16-560-16	85-15-560-16	85-P-560
8.5	9	9.9	10.4	14.5	15	85-11-580-16	85-12-580-16	85-16-580-16	85-15-580-16	85-P-580

\* Please check for any special conditions, or constant required by your specific receptacle on the receptacle description pages.